





This Brochure will take you into the world of Cabbani. This is a world where wood plays the leading role. Discover why nothing beats the charm and character of a wooden floor. Indeed, parquet is timeless while being more relevant than ever before.

Introduction 04-05

A sustainable choice 06-07

Inspiration 08-45

The collection 46-53

Finishing & Maintenance 54-57

Technical table 58-59

But because even the best photos sometimes fall short, we would like to invite you to a Cabbani distribution point to see and feel our parquet for real and to breathe in the aroma of the wood.

With this brochure, we hope to inspire you in your search for a durable floor with timeless beauty.




MADE IN FRANCE WITH LOVE

Thirty-five years ago, Gérard Cabannes gave shape to his dream. He began a veneer processing company surrounded by the inspiring vineyards of the Bordeaux region. He constantly built on his successes and with the second generation, Benoit and Julien Cabannes, this led to the production of laminated parquet in 2000.

Their brainchild, the parquet system à la carte, with which the customer can assemble a wooden floor as desired, turned out to be another bull's eye. Quality and flexibility took the company to the top of the upmarket wooden flooring segment in no time.

After a professional relationship for over 25 years, and in view of the complementarity of the production sites on both sides, Benoit and Julien decided to make the partnership more permanent and their company was integrated into the Decospan group. New opportunities arose. Since January 2016 their parquet has been available in specialised parquet shops under the CABBANI name. Under this brand name, we continue to invest in the production of this high quality custom French parquet to serve customers worldwide.

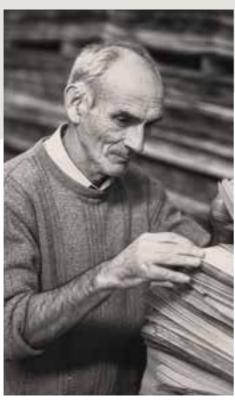









A SUSTAINABLE CHOICE

Decospan gives respect for nature a central place in its policy. This belief was embodied in the Pure Wood Charter. Suppliers are asked to sign and adhere to this charter. It gives a clear signal to both customers and suppliers that engagement in preserving nature is an important part of our strategy.

OXYGEN FOR THE ENVIRONMENT

Trees and forests are the green lungs of our planet. They take up CO_2 from the atmosphere and produce oxygen in the process. Relative to other building materials, wood can lead to a significant reduction of the amount of carbon dioxide. Every cubic metre of wood is equal to 2 tons less CO_2 in the atmosphere.

CARE FOR THE FUTURE

Wood is a sustainable and optimally recyclable resource. At the end of its lifecycle, it is perfect to reuse in new products and applications. In this way, a large volume of carbon is stored in the wood for a long time. Reusing wood also means that no other, often non-renewable, materials need to be used.

ATTENTION FOR FORESTRY

Responsible forest management with replanting and controlled felling maintains the total amount of trees and forests. This prevents this valuable resource from being exhausted prematurely and keeps our environment in balance. With this and other measures, we can confidently say that choosing wood means choosing the future while promoting a sustainable economy.

HEALTHY INTERIOR CLIMATE

In the meantime, a Cabbani parquet floor improves the air quality in your home. Indeed, all our efforts during the production process focus on making your house into a healthy home. We achieve this by only using harmless water stains and adhesives that are free of volatile organic compounds (VOCs). Our lacquers also contain a minimum of harmful solvents. This gave us an A+ label, which stands for the best residential air quality. Our products also meets all of the necessary qualifications to be certified FloorScore® conforms to the CDPH/EHLB Standard Method v1.2-2017 (California Section 01350), for the school classroom and private office parameters when modeled as Flooring.









PEFC™ stands out by taking into account the specific characteristics and legislation of every country.
PEFC™ aims to prove that is it possible to combine forest conservation with rising consumer demand for wood.

Available on request for projects from $500\ m^2$.



The mark of responsible forestry

FSC® is an international, independent, non-governmental non-profit organisation. It was established by forest owners, the wood sector, social movements and environmental organisations. FSC® promotes responsible forest management all over the world.

Available on request for projects from $500\,\text{m}^2$.

YOUR HOME IS WHERE OUR STORY BEGINS







Compose your own dream parquet

Cabbani stands out for its unique 'à la carte system'. By playing with and varying a number of parameters, the end result is guaranteed to meet all your requirements and expectations.

Easily design your personal wooden floor by choosing from 5 collections, 25 individual colours, 8 board dimensions, 4 different top layer thicknesses, 2 types of cores, 5 styles.

Learn about various options starting from page 46.





CHEVRON-S 14P - Malbec Rustic Mix









RISTRETTO 10H - Lys Rustic Mix



PREMIER 14H - Snow Rustic Nature







Did you know that Cabbani parquet is produced in the same region as the famous wines Saint-Emilion, Puisseguin, Pomerol... a stone's throw from Cognac? Cabbani also guarantees 100% French quality.



BATON-S 14P - Chablis Rustic Mix





Did you know that the patterns Herringbone 'Baton' and Hungarian Point 'Chevron' are the two oldest installation methods for wooden flooring? Herringbone is the oldest and finds its roots in Europe, were they probably wanted to repeat the zigzag pattern of earlier architectural styles. Those floors became extremely popular in France under the name 'Bâtons Rompus' which literally means 'broken sticks'. The Hungarian point came into fashion later, during the 17th century. They think it came from Italy and is therefore a riddle why it is named 'Hungarian'. Both patterns are made from the same sized pieces of wood that are installed in a synchronized zigzag pattern. Herringbone boards are rectangular and fit simply with tongue and groove. Hungarian point is cut at an angle causing the boards to form a perfect point.



BATON-S 14P & RISTRETTO 14P - Chablis Rustic Mix



DESIGNER 14P - Merlot Aged





To make our wooden floor look really old, dents and scratches are made on the board and in the bevel. Thus, it looks as if the floors have stood the test of time. This process is done entirely by hand, so we can talk about hand aged floors.

Within the Cabbani range you can only choose "aged" on birch plywood core in collections 2 and 4.



The size of the space determines the size of the boards. For smaller spaces, it is best to choose narrow, short boards. In large spaces, broad, long boards come more into their own. The orientation of the boards also has an effect. Long boards installed along the length of a room make the room look even longer.

Cabbani also has a nice range of pattern floors to give your room a superior appearance.







DESIGNER 19P - Natural Rustic Mix



ELITE 14H - Grenache Rustic Mix









DESIGNER 14P - Colombard Rustic Mix






ELITE 14P - Santal Rustic Mix





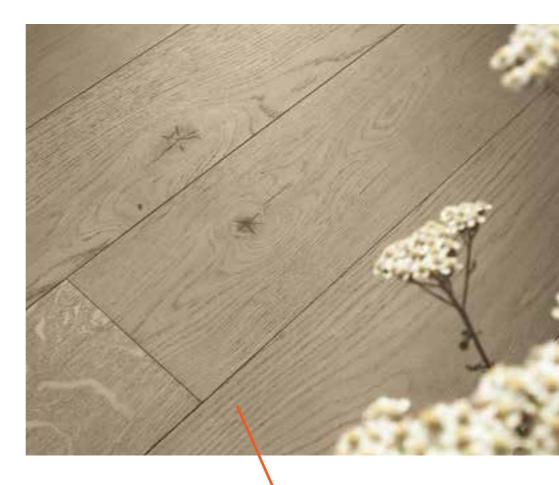



The specific circumstances and applications are very important to determine the right choice of parquet. Will it be installed in a high traffic area? Will it be used with or without underfloor heating? Will it be laid in an apartment or a single-family residence? Your distributor or flooring professional will be happy to help you find the solution that meets your needs.



PREMIER 14H - Essence Rustic Light





Fashion, beauty, food and interior. Currently all disciplines are fully involved and on the same wavelength. In all these areas we go for unprocessed, natural and pure.

According to trend watchers, one can perfectly explain why pure is a trend. After the excess of the 90s and early 21st century, we now choose for simple and sober. The planks are again recognized as real wood in its raw state.

With Essence, we respond to this demand and we give you a parquet with an appearance and touch of untreated wood.



Like any wooden floor, Cabbani floors are also susceptible to scratches and dents. But it is precisely this lived-in aspect that provides authentic character. If you still prefer to avoid this, plenty of solutions are available: keeping the floor clean, a doormat, felt pads under furniture legs, protective mats under chairs with wheels...

If necessary, your parquet can also easily be repaired locally or freshened up using our specially developed maintenance products. Ask your dealer or installer for our maintenance kit for oil our lacquered floors. It's the perfect start for a well maintained beautiful floor.





PREMIER 14H - Milk Select



Cabbani parquet is perfect for use in combination with underfloor heating, as long as the floor temperature does not rise above 27°C (80°F). Because there are different underfloor heating systems, we recommend following the manufacturer's instructions. Ask our distributors for more information. Specific laying instructions can also be found on www.cabbani.com/en/downloads.







DESIGNER 19P - Desert Rustic Mix



 ${\sf DESIGNER\,10H-Pure\,Rustic\,Mix}$





For our "Scratched" look, band saw marks are made on the oak top layer of your floor combined with our brushed effect. These markings are perpendicular to the wood grain and are applied to the surface ad random and in varied depths. That gives the wood a rustic, weathered look.



DESIGNER 10H - Pure Scratched



DESIGNER 19P - Bouchalès Rustic Mix



Wood is a natural, humidity-sensitive material. Warping can sometimes occur under the influence of excess moisture or extremely dry air depending on the climate in your region or the conditions in your residence. To avoid possible problems, we recommend monitoring the air humidity using a hygrometer and maintaining the level with a humidifier or dehumidifier. More information about this is available on our website and in our installation instructions.







ELITE 14H - Stone Rustic Mix







ELITE 14H - Shade Select





The warm character of your wooden floor is closely connected with its maintenance. Indeed, maintaining wooden flooring not only keeps it clean, but also has a nourishing and protective function. We supply the necessary maintenance products that are specifically designed for our floors, whether varnished or oiled. More information about this is given on page 57





We have all the necessary accessories to finish your Cabbani parquet perfectly. We have white pre-painted skirtings or beautiful 3-in-1 skirting's matching all of our design from our collection. The height of this veneer skirting board can be adjusted according to your taste or application. Furthermore, 3-in-1 profiles are also available (end, adjustment and transitional profiles) as well as matching stair tread nosing. More information is given on pages 55-56.



ELITE 14H - Boreal Rustic Mix







PREMIER 14H - Umber Select





Wood is a natural product. The differences in color and structure are part of it. This makes it beautiful and unique. There are different kinds and it gives the floor a certain appearance. Looking for a modern and stylish interior, choose for example a Select or Rustic Light grade that should not contain large knots. If you prefer a country style, choose a rustic floor with a Rustic Mix sort. Are you really looking for something unique, hard or sturdy, opt for a stylish interior with the Rustic Nature grade. The final appearance of the soil is also closely related to the choice of a varnish or an oil finish.



SIMPLY
CHOOSE THE
FLOOR THAT
SUITS YOU IN
5 STEPS



The Cabbani collection stands out through its unique 'A la carte sytem'. The end result can meet your expectations by varying and playing with some parameters.

In the next pages we'll explain the 5 steps you need to take to achieve your dreamfloor.



ROADMAP BOARD FLOOR

STEP 1: CHOOSE THE FLOOR







see pages 50-51

STEP 2: CHOOSE THE COLOUR

26 colours divided into 5 collections

Collection 01

Available in select and rustic - LACQUERED finish.



Collection 02

Available in select and rustic - OILED finish.



Collection 03

Available in rustic - LACQUERED finish.



Collection 04

Available in rustic - OILED finish.



Specials

Available in select and rustic - LACQUERED finish.




Smoked Walnut μ

☐ LAQUERED FINISH


O OILED FINISH



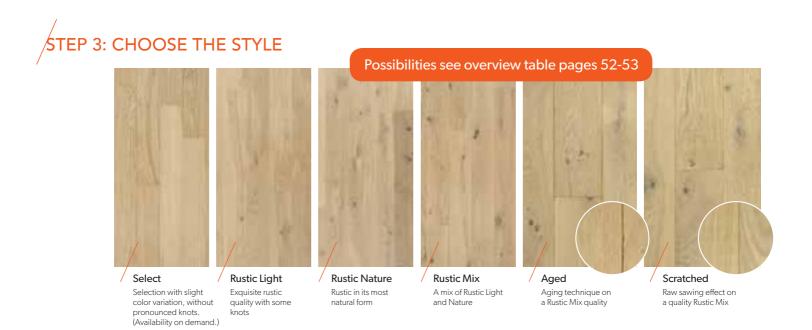

STEP 4: CHOOSE THE SIZE OF THE BOARD

Choice between 4 board sizes: Premier, Ristretto, Elite of Designer

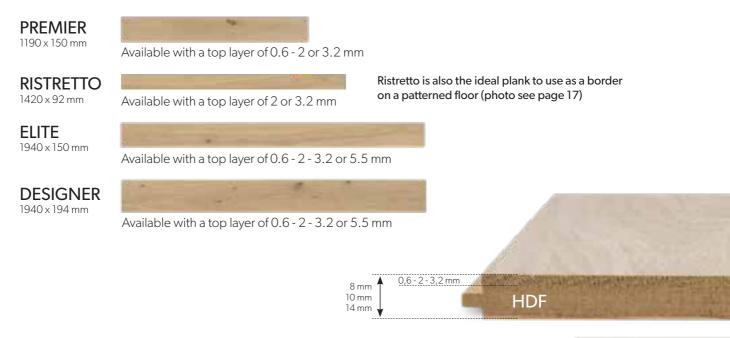

TEP 5: CHOOSE THE CORE AND THE THICKNESS

Choice between 2 cores: HDF or Birch Plywood Choice between 4 top layers: 0.6 - 2 - 3.2 - 5.5 mm depending the chosen board format and core




ROADMAP PATTERN FLOOR

STEP 1: CHOOSE THE FLOOR





see pages 48-49



STEP 2: CHOOSE THE COLOUR

21 colours divided into 4 collections

Collection 01

Available in select and rustic - LACQUERED finish.



Collection 02

Available in select and rustic - OILED finish.



Collection 04

Available in rustic - OILED finish.



Specials

Available in select and rustic - LACQUERED finish.




Smoked Walnut ¤

☐ LAQUERED FINISH

O OILED FINISH



STEP 3: CHOOSE THE STYLE

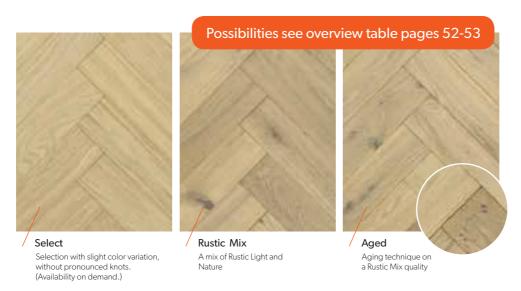

STEP 4: CHOOSE THE SIZE OF THE BOARD

Choice between 2 patterns: Baton or Chevron in 2 formats


Tip: Ristretto (see straight boards) is the ideal plank to use as a border on a patterned floor (photo see page 17)



BATON-S 610 x 92 mm (45°)



BATON-L 710 x 124 mm (45°)





CHEVRON-S 600 x 92 mm (45°)



600 mm



CHEVRON-L 700 x 124 mm (52°)

Available with a top layer of 2 or 3.2 mm

STEP 5: CHOOSE THE CORE AND THE THICKNESS

Choice between 2 cores: HDF or Birch Plywood. Choice between 2 wear layers: depending on the format and the chosen core






		PATTERN FLOOR							
		BATON				CHEVRON			
		BATO	ON S	BATO	ON-L	CHEV	RON-S	CHEV	RON-L
	Dimensions board > Tickness top layer > Thickness board >	610 x ! (24.02" 2 mm 10 mm (0,39")	92 mm ×3.62") 3,2 mm 14 mm (0,55")	710 x 1 (27.95" 2 mm 10 mm (0,39")	24 mm × 4.88") 3,2 mm 14 mm (0,55")	600 x (13.62" 2 mm 10 mm (0,39")	92 mm ×3.62") 3,2 mm 14 mm (0,55")	700 x 1 (27.56" 2 mm 10 mm (0,39")	24 mm × 4.88") 3,2 mm 14 mm (0,55")
X Laquered finish	Core	HDF	BP	HDF	BP	HDF	BP	HDF	BP
Claquered finish Oiled finish HDF (High Density Fibreboard) BP (Birch Plywood)		BATON-S 10H	BATON-S 14P	BATON-L 10H	BATON-L 14P	CHEVRON-S 10H	CHEVRON-S 14P	CHEVRON-L 10H	CHEVRON-L 14P
Collection 01	European Essence Ivory Umber Milk Desert				Sel - Rusti	ect c Mix			
Collection 02 o	Natural Pure Polar Snow Shade	Select Rustic Mix	Select 	Select Rustic Mix	Select Rustic Mix Aged	Select Rustic Mix	Select Rustic Mix Aged	Select Rustic Mix	Select
Collection 03	Himalaya Alps Stone								
Collection 04 O	Boreal Malbec Santal Grenache Merlot Lys Elixir Chablis Colombard Bouchalès	Rustic mix	Rustic Mix Rustic Mix Aged	Rustic mix	Rustic Mix Rustic Mix — Aged	Rustic mix	Rustic Mix Rustic Mix Aged	Rustic mix	Rustic Mix Rustic Mix — Aged
Specials ¤	Smoked Walnut	Select				Select			

							ВОА	RD FLC	OOR							
PREMIER RISTRETTO				ELITE					DESIGNER							
119	90 x 150 r 6.85" x 5.9	mm]")	1420 x (55,90"	92 mm × 3.62")	1940 × 150 mm (76.38" × 5.91")						1940 x 76.38"	194 mm × 7.64")				
0,6 mm	2 mm	3,2 mm	2 mm	3,2 mm	0,6 mm	2 mm	3,2 mm	2 mm	3,2 mm	5,5 mm	0,6 mm	2 mm	3,2 mm	2 mm	3,2 mm	5,5 mm
8 mm (0,31")	10 mm (0,39")	14 mm (0,55")	10 mm (0,39")	14 mm (0,55")	8 mm (0,31")	10 mm (0,39")	14 mm (0,55")	10 mm (0,39")	14 mm (0,55")	19 mm (0,75")	8 mm (0,31")	10 mm (0,39")	14 mm (0,55")	10 mm (0,39")	14 mm (0,55")	19 mm (0,75")
	HDF		HDF	BP	HDF BP						HDF	1		BP		
PREMIER 8H	PREMIER 10H	PREMIER 14H	RISTRETTO 10H	RISTRETTO 14P	ELITE 8H	ELITE 10H	ELITE 14H	ELITE 10P	ELITE 14P	ELITE 19P	DESIGNER 8H	DESIGNER 10H	DESIGNER 14H	DESIGNER 10P	DESIGNER 14P	DESIGNER 19P
Select	Select Select Rustic Light			Select Select Rustic Mix		Select		-	ect c Mix		Rustic Mix					
	Rustic Rustic	ect Light Nature ched	Select	Select		Rusti	lect c Mix cched	Rusti - Ag	lect 	Rustic Mix Aged Scratched		Rust	lect ic Mix tched	Rusti - Ag		Rustic Mix Aged Scratched
	Rusti	c Mix				Rusti	c Mix		Rustic Mix			Rust	ic Mix		Rustic Mix	
	Rustic	c Mix	Rusti	c Mix		Rusti	c Mix		Rustic Mix			Rust	ic Mix		Rustic Mix	
	Rustii Scrat	c Mix ched	Rustic Mix Scratched	Rustic Mix Aged Scratched		-	c Mix cched		Rustic Mix — Aged — Scratched				ic Mix tched		Rustic Mix Aged Scratched	
	Select Rustic Mix		Select													

HOW TO FINISH YOUR FLOOR AND KEEP IT IN PERFECT SHAPE

INTELLIGENT ACCESSORIES FOR A PERFECT FINISH

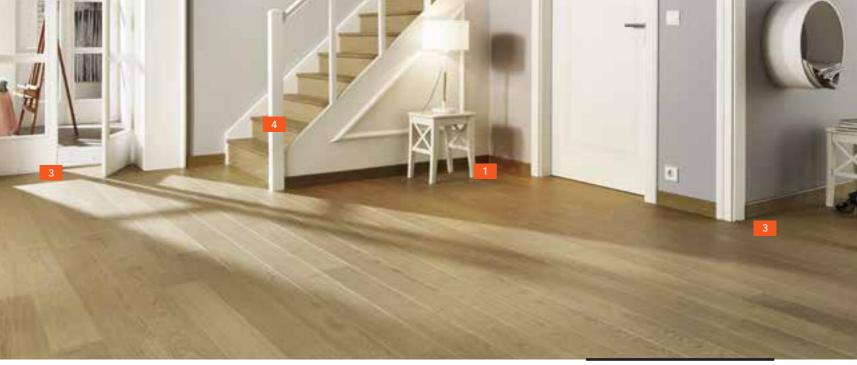

PREMIER 10H - Umber Select

1 VENEER SKIRTINGS 1 skirting, 3 heights



Cabbani skirting boards are available in 26 colours. The skirting boards are 80 mm (3") high, but can just as easily be shortened to 60 (2.4") or even 25 mm (1") in no time. The notches make it possible to place the skirting boards neatly and straight up to the desired height.

Skirting dimensions: 2150 x 80 x 14 mm (84.6" x 3.2" x 0.5")

2 PRE-PAINTED SKIRTINGS



Pre-painted skirtings with round edge on top, 69 mm high.

Dimensions: 2250 x 69 x 12mm (88.58" x 2.71" x 0.47")


3 PROFILES 1 profile, 3 applications





Profiles are intended to create an elegant transition or to take up height differences. Our useful profiles can be used for 3 applications: as an end profile, adjustment profile or transition profile.

Profile dimensions: 2150 x 47 x 11 mm (84.6" x 1.9" x 0.4")







4 TREAD NOSING



Cabbani parquet can also be used to finish stairs. We have developed solid tread nosing specifically for this application in all 25 colours from our product range.

Dimensions: 2400 x 60 x 10, 14 or 18.5mm options (94.5" x 2.4" x 3/8", 1/2" or 3/4" options)

5 SUBFLOORS

Cabbani parquet is usually glued down. However, if you do choose a floating installation, the parquet can easily be placed on a subfloor. In this case, only the tongue and the groove are glued to each other. Subfloors are primarily intended to provide a moisture barrier or noise muffling function. They are also able to conceal minor irregularities in the substrate.



- NOISE DAMPING SUBFLOOR: This 3.6 mm Cabbani subfloor with an aluminum layer on one side muffles reflected noise and conceals minor irregularities in the sublayer. Always put the aluminum side up and seal the edges of the strips tightly with Cabbani waterproof tape. This prevents moisture from the substrate from damaging the wooden floor.
- **STANDARD SUBFLOOR**: Our standard subfloor is 2 mm thick and consists of foam and plastic. The integrated plastic prevents damage to the wooden floor caused by moisture from the substrate. The edges of the strips also need to be affixed to each other tightly with Cabbani waterproof tape.



WATERPROOF TAPE: It is vital to protect your wooden floor from rising moisture. We strongly recommend only using our own, thoroughly tested waterproof tape to affix Cabbani subfloors to each other. This is the only way to guarantee adequate protection against moisture.

KEEP YOUR FLOOR IN GOOD CONDITION

MAINTAINING FLOORS WITH OILED FINISH

The oil we apply to our floors contains natural pigments and oils that may only be treated with our Cabbani maintenance and cleaning products.



If your floor looks dull due to trodden-in and caked-on dirt, 'Cabbani intensive cleaner' is the solution. This provides a deep cleaning that also removes some oil, which is why it is necessary to treat with 'Cabbani maintenance oil' in concentrated form afterward.

If you have underfloor heating, 'Cabbani maintenance oil' must be applied at least twice per year to nourish the wood adequately.

You can read our full maintenance instructions at www.cabbani.com/en/downloads.



It is important to avoid damaging the varnish when cleaning Cabbani floors with a varnish finish. That is why we recommend using our 'Cabbani cleaner'. This has been specially developed to remove dirt safely while protecting the wood.

'Cabbani cleaner' is available in concentrated version and must be diluted with water. To add an extra wear layer to your floor and to avoid or mask micro scratches we advise you to use our 'Cabbani Polish'. That extra protection makes your finish last longer and prevents adherence of dirt.





TECHNICAL SPECS

			PATTERN FLOORS			
		TEST METHOD	10H	14P		
	Dimensions	EN427/EN428	BATON-S 610 × 92 × 10 mm BATON-L 710 × 124 × 10 mm CHEVRON-S 600 × 92 × 10 mm CHEVRON-L 700 × 124 × 10 mm	BATON-S 610 x 92 x 14 mm BATON-L 710 x 124 x 14 mm CHEVRON-S 600 x 92 x 14 mm CHEVRON-L 700 x 124 x 14 mm		
WOOD VENEER	Domestic usage classification	EN 14354 1/1/2005	Class 23	Class 23		
FLOOR COVERING	Domestic usage classification	UPEC (indicatief)	U ₂₅ P ₃	U ₂₅ P ₃		
FLOOR COVERING	Commercial usage classification	XP B53-669 2012-02	not suitable	Class 31		
PARQUET	Commercial usage classification	UPEC (indicatief)	not suitable	U ₃ P ₂		
	Warranty	Cabbani	15 years	15 years		
	Marking CE	EN 14342 and EN 14354	certified	certified		
GENERAL	Moisture Content	EN 322	< 11%	< 11%		
PROPERTIES	Top layer thickness	EN 429	2 mm	3,2 mm		
	Deviation of squareness	EN 324-2	≤ 0,5 mm	≤ 0,5 mm		
	Cup in width direction	EN 14354	1,5 %	1,5 %		
	Flatness deviation		4 %	4 %		
	Internal bond	EN 319	>1,3 N/mm²	>1,3 N/mm²		
	Veneer glueing adhesion	EN 204/205	≥1 N/mm²	≥1 N/mm²		
	Density	EN 323/EN 672/EN 436	> 850 kg/m³	> 780 kg/m³		
	Weight/sqm		8,5 kg	12 kg		
CLASSIFICATION	Thickness distension	EN 13329 annex G	≤8%	≤8 %		
PROPERTIES	Resistance to abrasion	EN 112,73.XX	> 3000 revolutions	> 3000 revolutions		
	Resistance to impressions	EN 1534	≥20 N/mm²	≥20 N/mm²		
	Adhesion off the Lacquer/Olli (cross cut)	EN ISO 2409	Class <2	Class <2		
	Chemical resistance	EN 423/part2	grade 4*	grade 4*		
ADDITIONAL	Level of gloss	DEC-005	< 10% (matt)	< 10% (matt)		
PROPERTIES	Color Fastness	EN 105-B02	grade >6	grade >6		
	Underfloor heating		ok	ok		
	Heat flux	EN 12667	0,164 W/mK	0,168 W/mK		
	Thermal Resistance	EN 12667	0,061 m ² K/W	0,083 m ² K/W		
	Acoustic improvement (sound impact)	EN140-8/EN717-2(Ln,w)	64 dB	64 dB		
	Reduction of impact sound	EN140-8/EN717-2 (ΔLw)	15 dB	15 dB		
	Biological durability	EN 335-1 /EN335-2	Classe 1	Classe 1		
SAFETY	VOC loss	EN 664	<2,1 %	<2,1 %		
PROPERTIES	Formaldehyde emmissions	E1 (EN717-1)	Class E1 (<0,13 ppm)	Class E1 (<0,13 ppm)		
	Formaldehyde emmissions	E1 (EN717-2)	Class E1 (<3,5 mg/m³h)	Class E1 (<3,5 mg/m³h)		
	Fire resistance and smoke generation	EN 13501-1	D1Bfls1	D1Bfls1		
	Fire resistance	EN 14342	DFLs1/M4	DFLs1/M4		
	VOC loss	FCBA	A+	A+		
	Slip resistance (measured dry)	DIN 51131	Class R11 (average)	Class R11 (average)		
	inproduction (moduled dry)	,	c.acc.tir (average)	J.acc r (average)		



BOARD FLOORS									
8H	10H	14H	10P	14P	19P				
PREMIER 1190 x 150 x 8 mm ELITE 1940 x 150 x 8 mm DESIGNER 1940 x 194 x 8 mm	PREMIER 1190 x 150 x 10 mm RISTRETTO 1420 x 92 x 10 mm ELITE 1940 x 150 x 10 mm DESIGNER 1940 x 194 x 10 mm	PREMIER 1190 x 150 x 14 mm ELITE 1940 x 150 x 14 mm DESIGNER 1940 x 194 x 14 mm	ELITE 1940 x 150 x 10 mm DESIGNER 1940 x 194 x 10 mm	RISTRETTO 1420 x 92 x 14 mm ELITE 1940 x 150 x 14 mm DESIGNER 1940 x 194 x 14 mm	ELITE 1940 x 150 x 19 mm DESIGNER 1940 x 194 x 19 mm				
 Class 23	Class 23	Class 23	Class 23	Class 23	Class 23				
U ₂₅ P ₃	U ₂₅ P ₃	U ₂₅ P ₃	U ₂₅ P ₃	U ₂₅ P ₃	U ₂₅ P ₃				
not suitable	not suitable	Class 31	not suitable	Class 31	Class 33				
 not suitable	not suitable	U ₃ P ₂	not suitable	U ₂ P ₂	U ₃₅ P ₃				
15 years	15 years	15 years	15 years	15 years	15 years				
certified	certified	certified	certified	certified	certified				
< 6%	< 11%	< 11%	< 11%	< 11%	< 11%				
 0,6 mm	2 mm	3,2 mm	2 mm	3,2 mm	5,5 mm				
≤ 0,2 mm	≤ 0,5 mm	≤ 0,5 mm	≤ 0,5 mm	≤ 0,5 mm	≤ 0,5 mm				
0,2 %	1,5 %	1,5 %	1,5 %	1,5 %	1,5 %				
4%	4 %	4 %	4%	4 %	4 %				
>1,4 N/mm²	>1,3 N/mm²	>1,3 N/mm²	>1,4 N/mm²	>1,3 N/mm²	>1,3 N/mm²				
≥1 N/mm²	≥1 N/mm²	≥1 N/mm²	≥1 N/mm²	≥1 N/mm²	≥1 N/mm²				
> 850 kg/m³	> 850 kg/m³	> 850 kg/m³	> 780 kg/m³	> 780 kg/m³	> 780 kg/m³				
7 kg	8,5 kg	12 kg	8,5 kg	12 kg	15 kg				
≤8 %	≤8 %	≤8 %	≤8 %	≤8 %	≤8%				
> 3000 revolutions	> 3000 revolutions	> 3000 revolutions	> 3000 revolutions	> 3000 revolutions	> 3000 revolutions				
≥20 N/mm²	≥20 N/mm²	≥20 N/mm²	≥20 N/mm²	≥20 N/mm²	≥20 N/mm²				
Class <2	Class <2	Class <2	Class <2	Class <2	Class < 2				
grade 4*	grade 4*	grade 4*	grade 4*	grade 4*	grade 4*				
< 10% (matt)	< 10% (matt)	< 10% (matt)	< 10% (matt)	10% (matt)	10% (matt)				
grade >6	grade >6	grade >6	grade >6	grade >6	grade >6				
 ok	ok	ok	ok	ok	not suitable				
0,230W/mK	0,164 W/mK	0,172W/mK	0,163W/mK	0,168 W/mK	0,166 W/mK				
0,043 m ² K/W	0,061 m ² K/W	0,081 m ² K/W	0,062 m ² K/W	0,083 m ² K/W	0,114 m ² K/W				
65 dB	64 dB	64 dB	64 dB	64 dB	60 dB				
15 dB	15 dB	15 dB	15 dB	15 dB	16 dB				
Classe 1	Classe 1	Classe 1	Classe 1	Classe 1	Classe 1				
<2,1 %	<2,1 %	<2,1 %	<2,1 %	<2,1 %	<2,1 %				
Class E1 (<0,13 ppm)	Class E1 (<0,13 ppm)	Class E1 (<0,13 ppm)	Class E1 (<0,13 ppm)	Class E1 (<0,13 ppm)	Class E1 (<0,13 ppm)				
Class E1 (<3,5 mg/m³h)	Class E1 (<3,5 mg/m³h)	Class E1 (<3,5 mg/m³h)	Class E1 (<3,5 mg/m³h)	Class E1 (<3,5 mg/m³h)	Class E1 (<3,5 mg/m³h)				
Cfls1	D1Bfls1	D1Bfls1	Cfls1	D1Bfls1	D1Bfls1				
	DFLs1/M4	DFLs1/M4	DFLs1/M4	DFLs1/M4	CFLs1/M3				
А	A+	A+	Α+	A+	A+				
 Class R11 (average)	Class R11 (average)	Class R11 (average)	Class R11 (average)	Class R11 (average)	Class R11 (average)				
Class ≥15 (USRV)	Class ≥15 (USRV)	Class ≥15 (USRV)	Class ≥15 (USRV)	Class ≥15 (USRV)	Class ≥15 (USRV)				



Also watch our Cabbani video on www.cabbani.com



Cabannes SAS Le Cabaret 17210 Chevanceaux-France tel +32 56 52 88 00 info@cabbani.com



www.cabbani.com



© Decospan 2019 - Nothing from this brochure may be reproduced without written prior permission.

Please note that the information in this brochure may be outdated and a new version may already have been issued. That is why we recommend you to always consult our website to download the most recent version. The photos of the different wood species, as shown in this brochure, are a representation of a unique part of wood and are not binding for future deliveries.

Decospan is committed to the continuous improvement of its products and services, therefor the actual products may differ from the products and pictures in this brochure. Decospan disclaims any liability pursuant to the variations that may occur between the products and pictures in this brochure and the actual products. All content in this brochure is for information purposes only and no rights can be obtained therefrom.

a product of DECOSPAN.

Wood Solutions